



How to fit your
Panel Blinds




Hallis Hudson Group Limited,
Unit C34, Red Scar Business Park, Longridge Road, Preston, Lancashire, PR2 5NN

How to fit your Panel Blinds


1 To fix the brackets

Your Panel blind will be supplied with a sufficient number of fixing brackets to complete the installation.

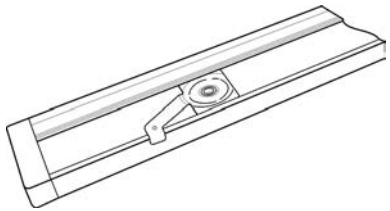

Fix your end brackets 50mm to 75mm in from each end. The remaining brackets should be spaced evenly between them. One fixing screw should be used in the centre hole of each bracket.

In a normal installation, please ensure that there is a 40mm clearance for the bracket from any obstructions i.e. a pelmet.

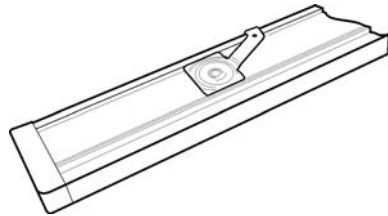

However if the blind is a 4-track, split draw configuration only, the headrail must be turned through 180° and the brackets fixed 60mm from any obstruction.

2 Public safety

• Wand Operated

Panel blinds can be traversed and rotated using a wand, removing the need for a cord or chain.

• Cord & Chain Tidy

The cord and/or chain can be secured within the tidy and retained tight against the wall.

• Cord & Chain Cleat

The cord and chain cleat is fixed to the side of the window recess and allows the cord or chain to be neatly wrapped around it, safely out of the reach of children.