

# INTEGRA: REGULAR & DOUBLE DUTY Cord Safety Device Fitting Instructions:


## Step 1

Using the two screws supplied to attach the tension pulley to your wall or window sill using the appropriate fixings for your surface, with the pulley being directly in line with the pull cord as shown (fig 1).




## Step 2

Extend the neck of the pulley and secure in the higher position using a pin or small nail to temporarily hold in place. Unclip the central barrel of the pulley by pulling it down and then out (fig 2).

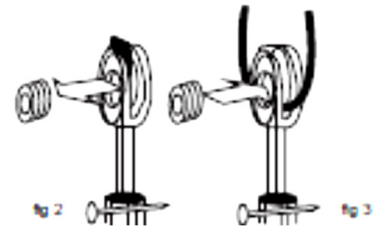

## Step 3

Place the cord inside the pulley and replace the barrel ensuring it clicks into place (fig 3).

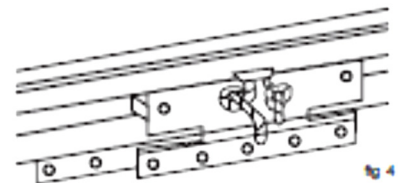

## Step 4

Take up the slack of the cord and tie a knot behind the masterslide arm. Remove the pin or nail from the pulley, the cord will now be fully tensioned. If there is insufficient tension in the cord, reduce the cord length by adjusting the knot behind the masterslide arm (fig 4).



## Step 5

If the cord becomes twisted, rotate the head of the pulley to untwist it (fig 5).

The track is now ready to drape your curtains.

### WARNING!

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist and create loops.



### Specific warning for non-integral devices

Children can strangle if this safety device is not installed. Always use this device to keep cords or chains out of reach of children.

## Safety device fitting instructions...

**Note** The fixed retaining safety device must be installed at the maximum distance possible from the control mechanism to ensure that the chain remains taut.

**Step 1.** Screw the safety device to the wall using appropriate fixings for the surface you are fitting to.

**WARNING!** The distance from the floor to the bottom of the chain must be AT LEAST 150cm. Children can strangle if this safety device is not installed.

**Step 2.** Ensuring that the chain remains taut, place the chain into the safety device.

**Step 3.** Having checked that the bottom of the chain is at least 150cm from the floor, replace the safety device cover.

**Step 4.** Warning labels must be left on the chain for the notice of the end user.

— HALLIS HUDSON —  
Committed to excellence

Hallis Hudson Group Ltd, Unit B1, Red Scar Business Park, Longridge Road, Preston, Lancashire, PR2 5NJ  
Sales Tel: 01772 202 202 | Sales Fax: 01772 515 515 e-mail: sales@hallishudson.com | www.halliswebshop.com  
www.hallishudson.com